



**MIRO-Fin**

# MIRO-Fin®


## LASER WELDED ABSORBER FIN PRODUCTION

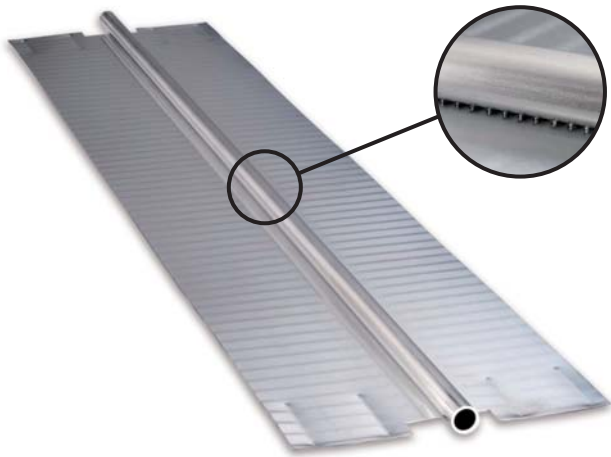

MIRO-Fin® overlap

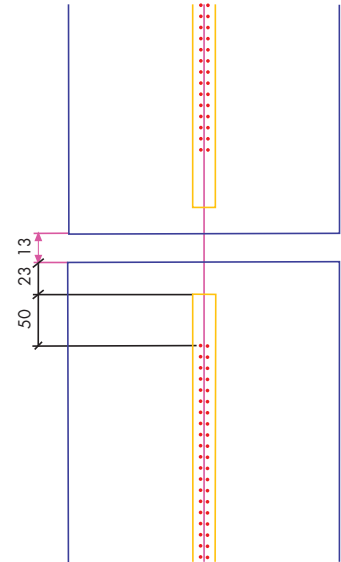

MIRO-Fin® standard

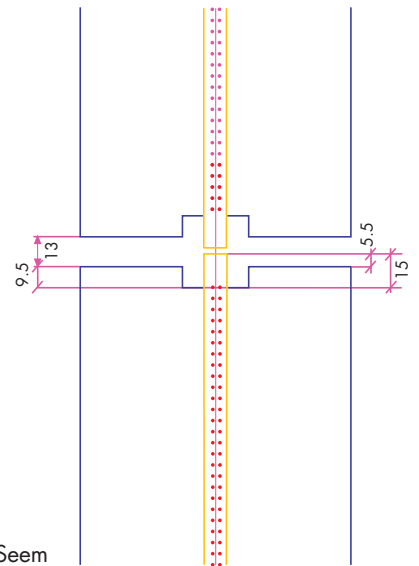

Laser Welded for Maximum Durability  
Powered by mirotherm® - 95% Absorption 5% emission

Standard Fin Width: 4.72" / 120mm  
Min fin width: 3.9" / 100mm  
Max fin width: 6.3" / 160mm

**Thickness of mirotherm® sheet material:**

Standard: 0.02" / 0,5mm  
available in: 0.015" / 0,4mm as well

**Copper Tube:**

Standard Tube Wall thickness: 0.015" / 0,4mm  
Tube diameter possibilities: 0.393" / 10,0 mm OD or  
1/2" / 12,7mm OD

**Fin end possibilities:**

Overlap or Standard



WESTLAKE METAL IND.